


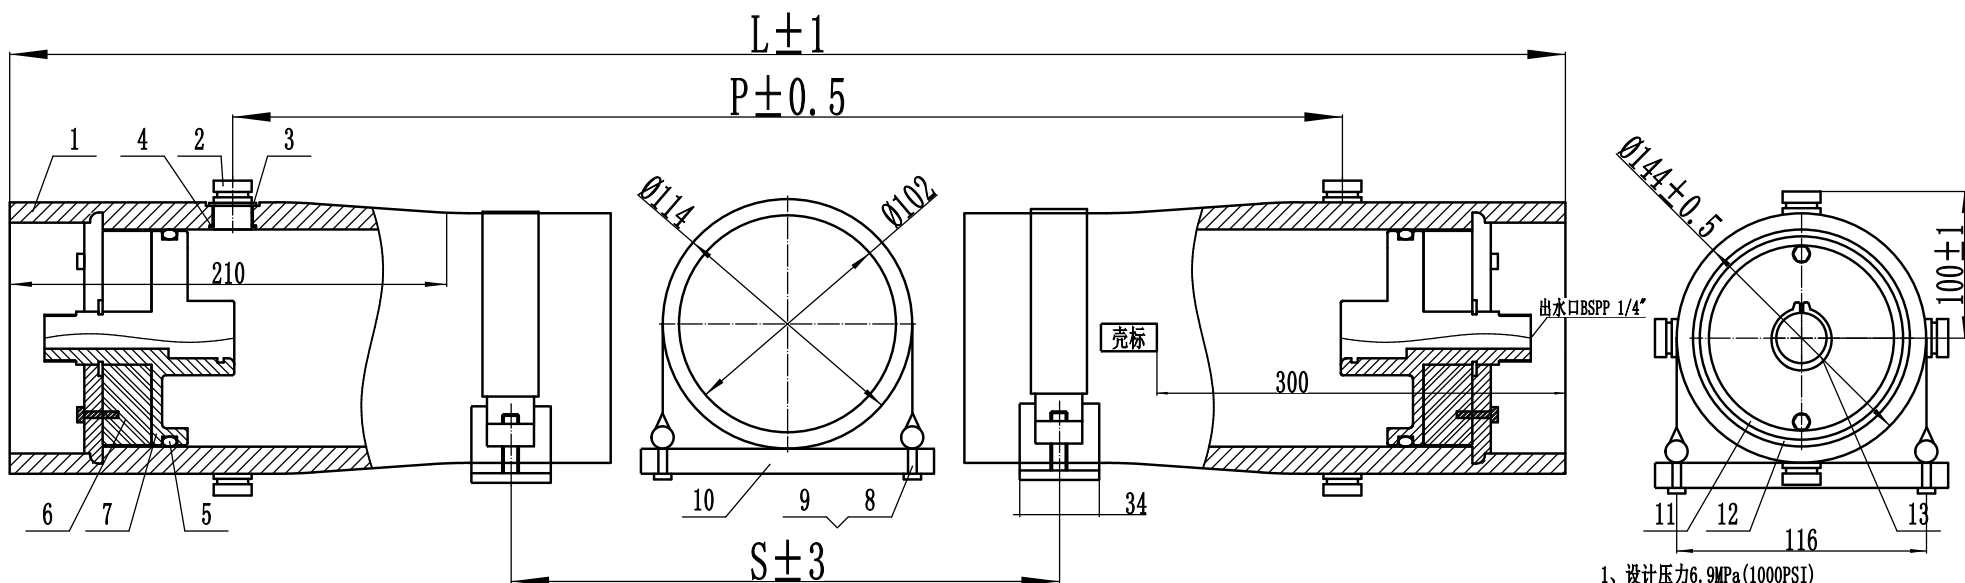

- 设计压力6.9MPa(1000PSI)
Design Pressure 6.9MPa(1000PSI)
- 设计温度66℃ (150° F)
Design Temperature 66℃ (150° F)
- 最低允许温度-10℃ (14° F)
Min Temperature -10℃ (14° F)
- 工作介质为PH3-10的水
Media:Water PH3-10
- 图纸仅供参考, 具体以实物为准
Drawings are for reference only, in kind
- 请按照说明书正确使用
Please operate it according to operation manual

长度编 码length	S (mm)	L (mm)	P (mm)	重量 WEIGHT (kg)	13 卡簧Permeate Rrtaining Ring	2 SUS304
1	735 (28.9)	1234 (48.6)	988 (38.9)	15.5 (34.1)	12 挡块Stop dog	6 SUS304
2	1751 (68.9)	2250 (88.6)	2004 (78.9)	18.5 (40.7)	11 挡圈Retaining ring	2 SUS304
3	2767 (108.9)	3266 (128.6)	3020 (118.9)	21.5 (47.3)	10 鞍座Saddle	2-3 TPU (S60D)
4	3783 (148.9)	4282 (168.6)	4036 (158.9)	24.5 (53.9)	08/09 钢带Strap+螺丝screwhead	2-3 A-666, 304+SUS304
					07 密封板Sealboard	2 ABS
					06 承压板Pressure plate	2 SB-209, 6061-T651
					05 大O型胶圈Large O-type rubber ring	2 EPDM 512
					04 侧口密封圈Side screw sealing ring	2 EPDM 512
					03 侧口螺母Side nut	2 SUS304
					02 侧口Side entrance	2 SUS316L
					01 壳体Shell	1 环氧+玻纤Epoxy + glass fiber
					名称	数量 材料

SIGNATURE			 河北成达华膜科技有限公司 Hebei Chengda HuaMo Technology Co.,Ltd
DESIGN	NAME	DATE	
	陈勇	2018.1.25	型号 TYPE 4寸侧开1000P
THIS DRAWING CAN NOT BE USED WITHOUT PRIOR WRITTEN APPROVAL OF OUR COMPANY			单位UNIT: MM
			仅供参考, 零部件以图纸为准, 变更不另行通知